

# COTS Rugged Military Grade 1U Rackmount Keyboard Video Monitor

## CCXR-17 Display Photos




24"




19"

I/O connectors are dependent upon the options selected. See specifications for details.

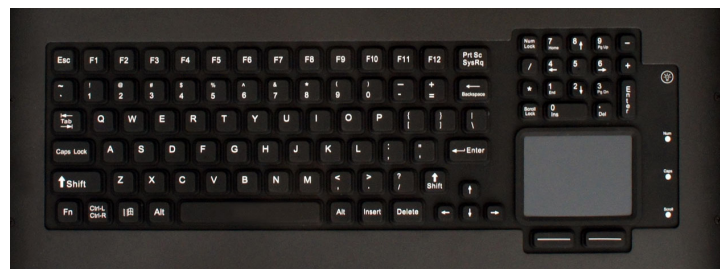

Touch Pad Keyboard Option

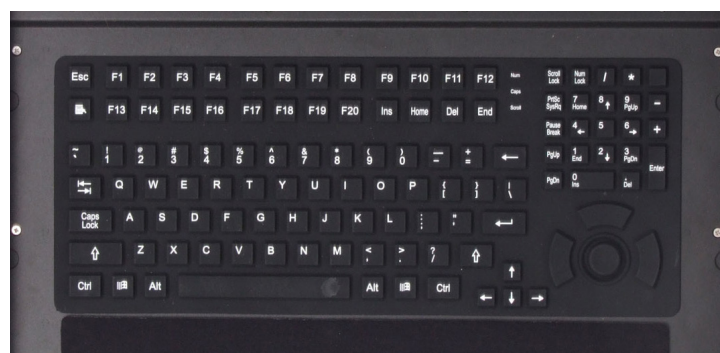

Hula Point Keyboard Option



## Screen Size 17", Side-Access Keyboard and LCD Monitor

Assembled in the USA  
ISO 9001:2008 Certified  
ITAR Registered

The CCXR-17 is a unique side access, space efficient, military grade, high performance 1U rackmount clamshell LCD keyboard drawer offering a 17-inch display. The unique side access feature minimizes required aisle space by placing the operator next to the rack instead of positioned in the aisle. There is no other 1U LCD keyboard which offers this space saving feature (patent pending).

Specifications for our standard products can always be customized to fit your unique application requirements.

In-house Engineering Department

Rapid Prototyping



## Applications

- Airborne Operations
- Land-based Operations
- Seaborne Operations
- Telemetry
- Diagnostics
- Simulation
- C4ISR
- Communications
- Imaging
- Persistent Surveillance
- UAVs
- Automation
- Severe Environment Operations

## Features

- Side-access keyboard video monitor
- Lightweight aluminum construction
- Keyboard protected to NEMA 4/IP65

## Harsh Environments

Designed to meet or exceed MIL-STD-810G to the below specifications.

### ALTITUDE

10,000 ft Operational, 30,000 ft Storage  
MIL-STD-810, Method 500.5

### HIGH TEMPERATURE

70°C Operational, 80°C Storage  
MIL-STD-810, Method 501.5

### LOW TEMPERATURE

-20°C Operational, -30°C Storage  
MIL-STD-810, Method 502.5

### HUMIDITY

5-95%, Non-condensing  
MIL-STD-810, Method 507.5

### BLOWING SAND AND DUST

Procedures I and II  
MIL-STD-810, Method 510.5 (bonded glass only)

### TRANSPORT VIBRATION

US Highway Truck and Air Transport  
MIL-STD-810, Method 514.6

### BENCH HANDLING SHOCK

Procedure VI, 20G @ 11ms  
MIL-STD-810, Method 516.6

## Who We Are

### CHASSIS PLANS

- Chassis Plans designs, fabricates and integrates standard and customized high-performance computing platforms and LCD monitors for military, industry, and commercial applications.
- Using COTS components, Chassis Plans provides solutions for customers who need reliable systems that will operate in a variety of harsh conditions and who require revision control and hardware consistency for multi-year programs.
- Chassis Plans is an ITAR Registered and SBA-certified small business that has been operating in Southern California for over a decade.

### YOUR CONFIGURATION. ONE PART NUMBER.

- It's our mission to make your life easier, so our Sales Engineers will walk you through the ordering process, making sure the details are resolved and that you get what you need.
- One part number means easier procurement and less paperwork for you.
- Dedicated Sales and Program Managers.
- Last time buy opportunities for end-of-life components.



For more information visit  
[www.chassis-plans.com](http://www.chassis-plans.com)  
or call 858.571.4330

Chassis Plans  
10840 Thornmint Road · San Diego, CA 92127

©2017 Chassis Plans LLC. All Rights Reserved. No part of this document may be copied or reproduced without prior consent.

CCR-17-0117

For more information visit  
[www.chassis-plans.com](http://www.chassis-plans.com)  
or call 858.571.4330



# COTS Rugged Military Grade 1U Rackmount KVM

MILITARY | INDUSTRIAL | COMMERCIAL



## CCXR-17 Panel Specifications

### DIMENSIONS

19" X 1.75" X 24.4" (482.6mm X 44.45mm X 619.76mm)

### ENCLOSURE DETAILS

#### Construction

High-strength 5052-H32 aircraft-grade aluminum, solid milled front panel, includes Cable Management Arm (24.4" deep)

#### Powdercoating

Black per MIL-PRF-24712, Type IV, Class 3, Cardinal C214-BK110 polyester semi-gloss, fine texture

#### Plating

Chem-Film per MIL-C-5541F, Class 1A

#### Slides

Solid Bearing Slides (Friction Slides), 15.4-inches of travel

Lock-out button. Stainless self-locking hardware throughout

Includes Extension Bracket (0 to 6.5" extension)

Includes Extension Bracket (3 to 11" extension)

### OPTIONAL DISPLAY ENHANCEMENTS

#### Safety Glass

Using 3mm smudge-resistant AR coated soda lime float glass, bonded to the LCD panel with optical index matched adhesive

#### EMI Protection

Using a laminate of 1.1mm smudge-resistant AR coated soda lime float glass panel and a 1.1 mm ITO coated glass panel (<12.5Ω/sq) grounded via a copper buss bar, bonded to the LCD panel with optical index matched adhesive

### KVM SWITCH BOX

4-port VGA KVM with USB and PS/2 keyboard interface

## Panel Details

	CCXR-17
SCREEN DIAGONAL	17"
WEIGHT (system)	20 lbs
CONTRAST RATIO (typical)	1000:1
VIEWING ANGLE	80° (L/R/U/D)
RESPONSE TIME (typical)	30ms
NATIVE RESOLUTION	1280 x 1024
BRIGHTNESS	350 cd/m <sup>2</sup>
BACKLIGHT	LED
COLORS	16.7M

## Power Details

POWER INPUT (native 12 VDC with options)


AC input 85 to 264VAC, 1275/704 28VCD

POWER DISSIPATION (typical)

42 Watts

EXTERIOR POWER JACK (optional)

Yes

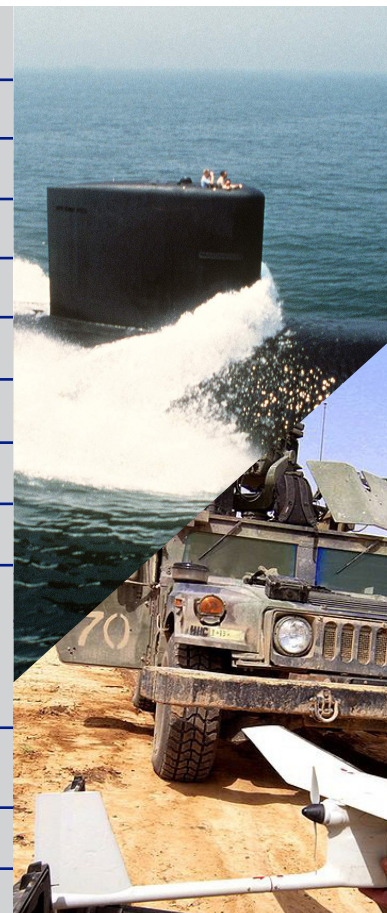

## Controller Specifications

	Standard
<b>SUPPORTED VIDEO RESOLUTION</b>	
VGA (640 x 480)	•
WVGA (800 x 480)	
SVGA (800 x 600)	•
XGA (1024 x 768)	•
SXGA (1280 x 1024)	•
WXGA (1366 x 768)	
WXGA (1280 x 768, 1280 x 800, 1440 x 900)	
WSXGA+ (1680 x 1050)	
HD-1080 (1920 x 1080)	
WUXGA (1920 x 1200)	
<b>INPUTS</b>	
<b>Standard</b>	
ARGB (15 Pin VGA)	•
DVI-D Input	•
PAL / NTSC / SECAM	
HDMI 1.3	
<b>Optional</b>	
Composite Video Input	
HD Component YPbPr	
SD Component YCbCr	
<b>FEATURES</b>	
Image Up-Scaling	•
Image Down-Scaling	
Picture In Picture	
Memory Buffer	
Sync On Green/Composite	•
DV RS-232 Serial Protocol	•
Ethernet Command Protocol	
Picture By Picture	
Text Overlay Function	
Variable Aspect	
Freeze & Zoom Function	
Programmable Hot Keys	

## Power Alternative

Chassis Plans' 2U-5U rackmount computer systems are designed with a removable back plate that allows a 12V power cord to run from the computer's power supply to a display or keyboard video monitor. This optional feature, the Exterior Power Jack, is available for this monitor.

By running the display with the computer systems' power supply, this Exterior Power Jack option can provide many benefits:

- Reduction in the number of required cables
- Elimination of additional equipment, i.e., a power brick
- Reduction in total system weight and cost

To enjoy these benefits, power up your new display with a Chassis Plans' server.

## Keyboard Details

- Sealed silicone rubber keyboard
- 97 keys (Touch Pad) or 113 keys (Hula Point)
- 12 (Touch Pad) or 20 (Hula Point) function keys
- Integrated numeric pad
- High quality carbon-on-gold contacts
- Protection to NEMA 4 / IP65
- PS/2 or USB Connection
- Tactile keystroke
- 10,000,000 lifecycles per switch
- Built-in sealed Touch Pad or Hula Point mouse devices
- USB interface only on Touch Pad version
- USB or PS/2 interface on Hula Point version

